Ezvent®Continuous Soffit Vent



EXTRUDED PVC

US Patents #5,881,502 / #5,937,592. US Trademark #2,149,898

<u>DESIGN FEATURES</u>: The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Patents cover use of Tamlyn H Mold at seams.

MATERIAL: Extruded rigid PVC, industry-standard, durable, chemically resistant product designed for outdoor weatherability.

WARNING: Use light or pastel paint colors only on Tamlyn PVC or Sherwin-Williams Vinyl Safe™ Paint. Use of dark color paint will cause deformation. Tamlyn vinyl products are not warranted if painted with dark color paint.

2" EZVENT®


| ITEM ID | PANEL SIZE | LENGTH | NFA* |
|---------|--------------|--------|------|
| EZV148 | 1/4" (6mm) | 8' | 9 |
| EZV5168 | 5/16" (8mm) | 8' | 9 |
| EZV7168 | 7/16" (11mm) | 8' | 9 |

*NFA = net free area / sq.in. per lineal ft.

4" EZVENT®

| ITEM ID | PANEL SIZE | LENGTH | NFA* |
|----------|-------------|--------|------|
| EZV144 | 1/4" (6mm) | 8' | 18.8 |
| EZV51648 | 5/16" (8mm) | 8' | 18.8 |

*NFA = net free area / sq.in. per lineal ft.

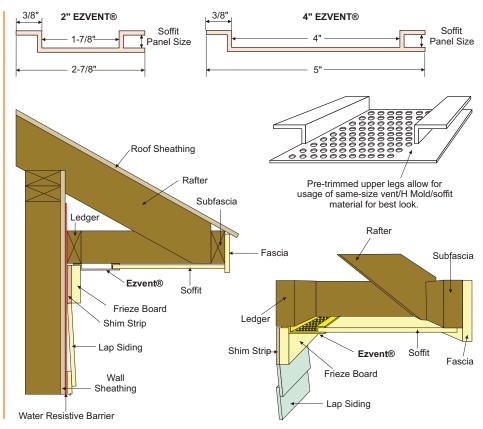

Aluminum Ezvent®Continuous Soffit Vent



EXTRUDED ALUMINUM


<u>DESIGN FEATURES</u>: The best looking, most "framer-friendly", easy to install, effective continuous soffit vent on the market. Unique double leg channels hide edges of soffit material for clean look and help prevent vent from being pulled up into subfascia. Patents cover use of Tamlyn H Mold at

MATERIAL: 6063 T-5 .050" (1.27mm) ± .005 extruded aluminum alloy with proprietary coating that protects against harsh weather conditions and allows for paint adhesion.

FINISH: Mill or Primed

| ITEM ID | PANEL SIZE | LENGTH | NFA* |
|-----------|-------------|--------|------|
| XEZV51648 | 5/16" (8mm) | 8' | 18.8 |

*NFA = net free area / sq.in. per lineal ft.

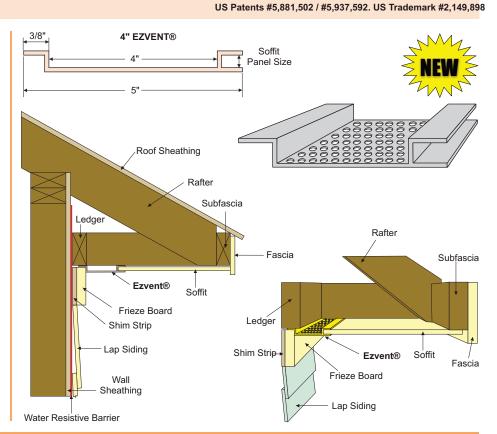

58 www.xtremetrim.com © 2015 TAMLYN